


CONNECTIONS

Sensor Type	Connections to Control Board
GSM aerial	SMA aerial connection on Control Board

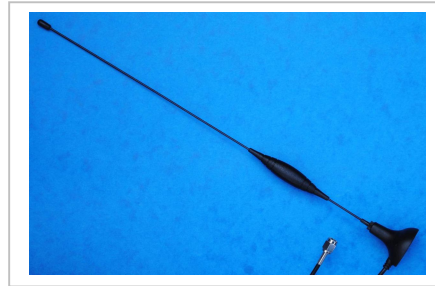

**GSM
Aerial**

High gain

Item
40G31

Note

For areas where poor / intermittent GSM signals are expected.

CALIBRATION

None

Orientation

Vertical for best results.

Construction and Information

Gain	5dB
Cable length	5m
Band width	Quad Band
Fixing	Magnetic mount
Temperature range	-40 to +85 Deg C

PO Box 103, Safron Walden, CB11 3GD, UK
 T: +44 1799 550837, e: info@general-alert.com
 W: www.general-alert.com